


P-Q Curves & Input Power

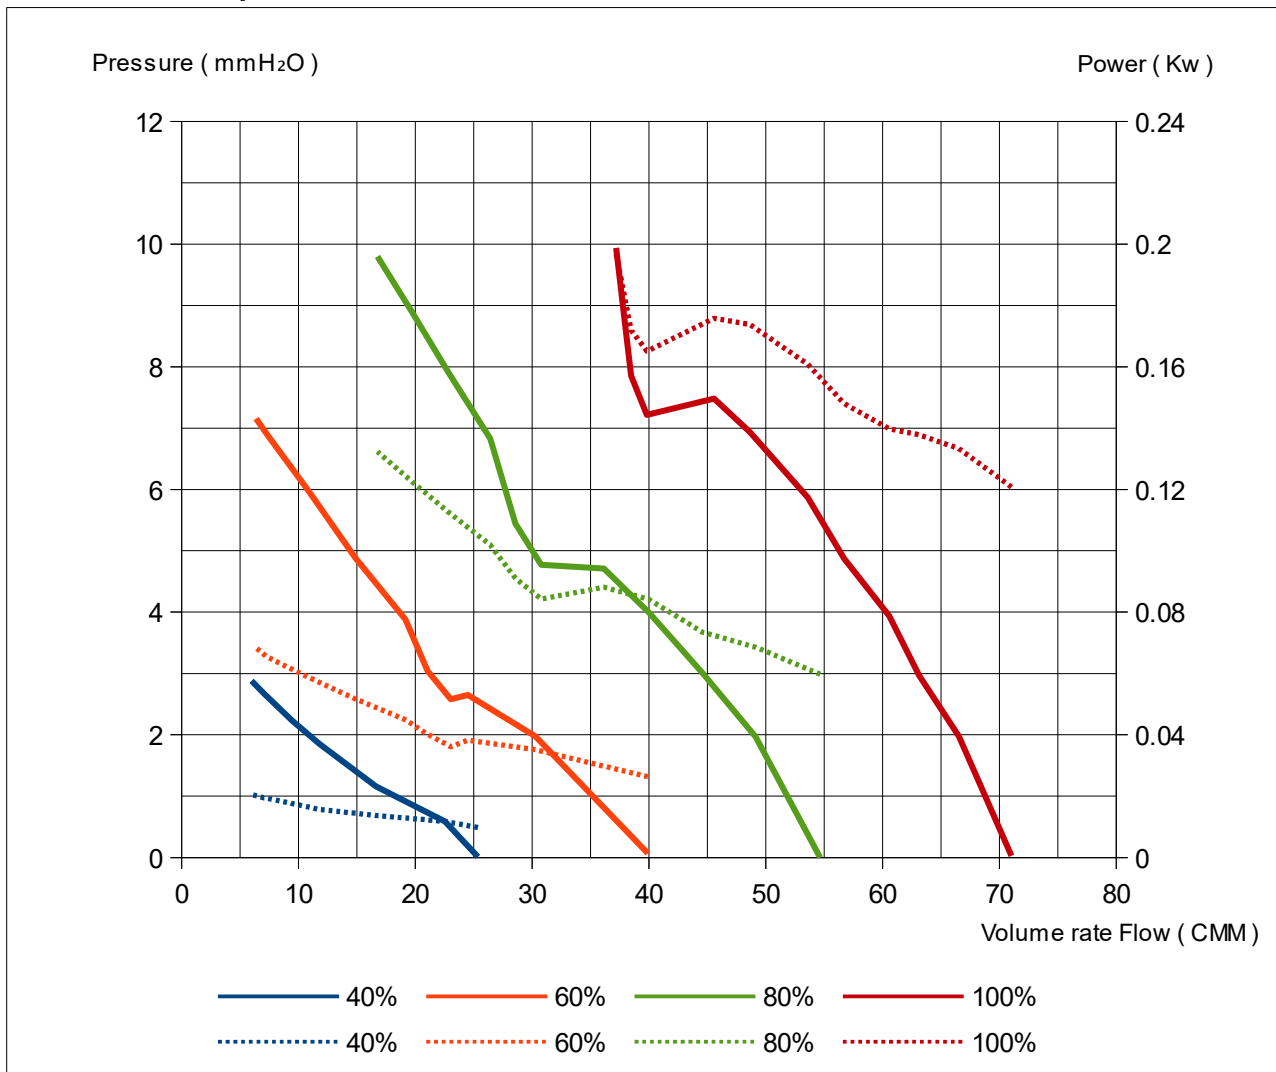

Test Method AMCA210-16, Figure12-Outlet Chamber Setup-Multiple Nozzle In Chamber

Model No.	Fan Size mm	Nominal Voltage V	Frequency Hz	Speed RPM
AW450S-EC2-KD	450	220V, DC310V	50-60	1100
	Power Input W	Current Max A	Perm.amb.temp ℃	
	140	1.00	-25℃ ~ +65℃	

FAN 속도 무부하(정압0)	전류 A		입력동력 W		회전수 RPM		풍량 CMM	소음 dBA
	min.	max.	min.	max.	min.	max.		
40%	0.13	0.13	10	11	436	438	25.3	43
60%	0.23	0.24	26	27	651	655	39.9	48
80%	0.42	0.45	57	62	871	875	54.6	51
100%	0.76	0.81	112	120	1086	1093	71.0	55